

MABA-009487-60HWCA



E-Series Transformer, RF 1:1
0.4 – 500 MHz


Rev. V5

Features


- Surface mount
- 1:1 Impedance ratio
- Centre tap on secondary
- RoHS compliant *
- 260°C reflow compatible
- Available on tape and reel

Description

MACOM's MABA-009487-60HWCA is a 1:1 RF flux coupled transformer in a low cost surface mount package. Ideally suited for high volume cellular and wireless applications. Typical applications include single to balanced mode conversion and impedance matching. MABA-009487-60HWCA transformer is designed to be utilized in both standard and high temperature soldering reflow profiles.

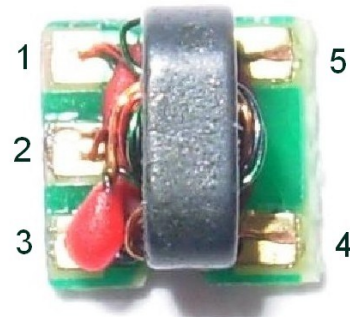

Functional Schematic

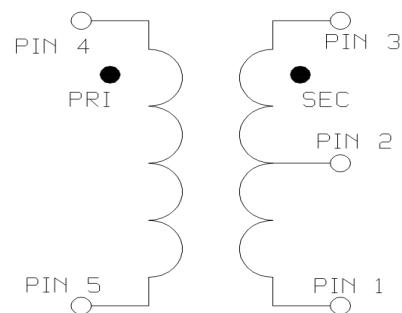

Ordering Information

Part Number	Package
MABA-009487-60HWCA	Tape & Reel

Pin Configuration

Pin No.	Function
1	Secondary
2	Secondary Centre Tap
3	Secondary Dot
4	Primary Dot
5	Primary

* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU

MABA-009487-60HWCA



E-Series Transformer, RF 1:1
0.4 – 500 MHz

Rev. V5

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50 \Omega$, $P_{in} = 0\text{dBm}$

Parameter	Conditions	Units	Min	Typ	Max
Frequency Range		MHz	0.4		500
Impedance		Ω		50	
Impedance Ratio				1:1	
Insertion Loss	0.4 - 200 MHz	dB	-	0.2	0.6
	200 - 400 MHz	dB	-	1.2	2.0
	400 - 500 MHz	dB	-	2.3	3.0
Amplitude Balance	0.4 - 500 MHz	dB	-	0.5	± 2.0
Phase Balance	0.4 - 500 MHz	$^\circ$	-	1.0	± 3.0
Input Return Loss	2 - 100 MHz	dB	20	26	-
	0.4 - 200 MHz	dB	13	20	-
	200 - 500 MHz	dB	9	10	-

Recommended Maximum Ratings

Parameter	Units	Min	Max
Input RF Power	mW		250
DC Current	mA		240
Operating Temperature Range	$^\circ\text{C}$	-40	+85

Full temperature plots available on request

Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	2000
Reel size	mm	330
Tape width (W)	mm	12.00
Pitch (P_1)	mm	8.00
A_0	mm	4.0
B_0	mm	4.0
K_0	mm	2.9
Orientation	-	F31
Reference Application note ANI-019 for orientation		


MABA-009487-60HWCA



E-Series Transformer, RF 1:1
0.4 – 500 MHz


Rev. V5

Outline Drawing

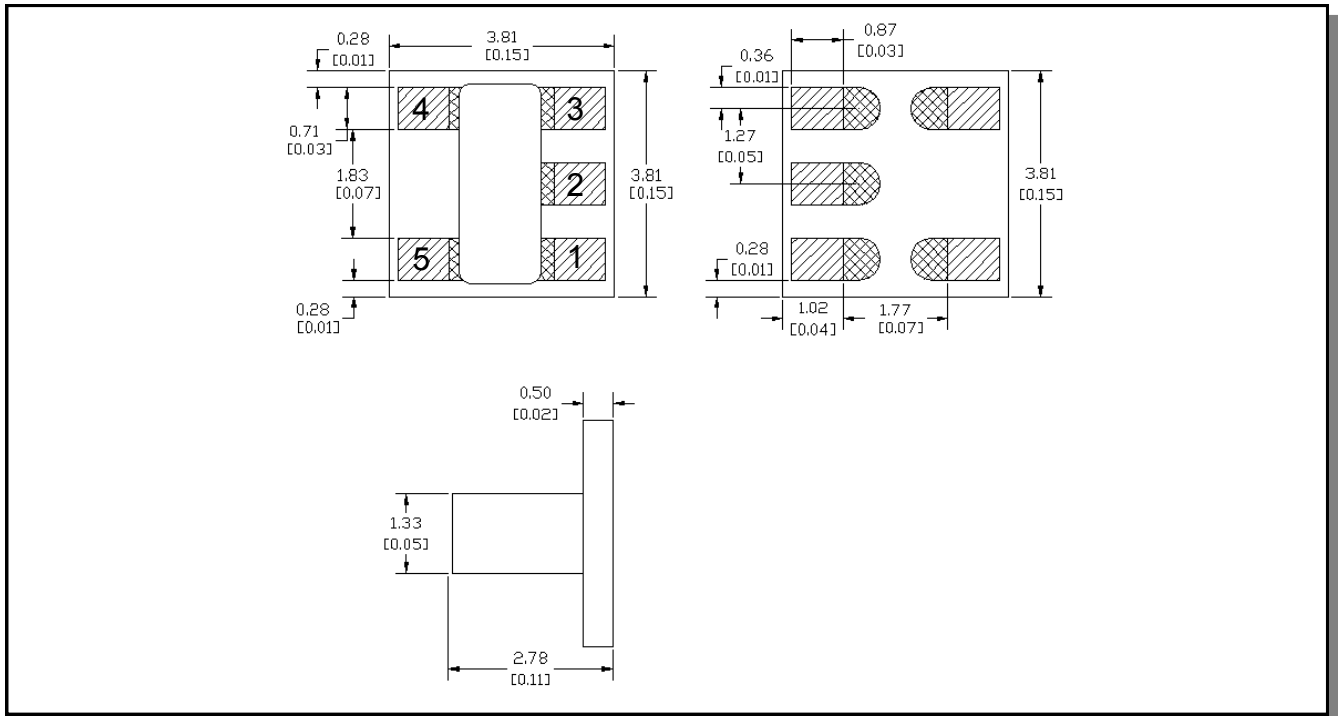


1. Dimensions in mm.
2. Tolerance: ± 0.2 mm unless otherwise noted.
3. Model number and lot code are printed on the reel.
4. Plating finish: ENIG

PCB Layout

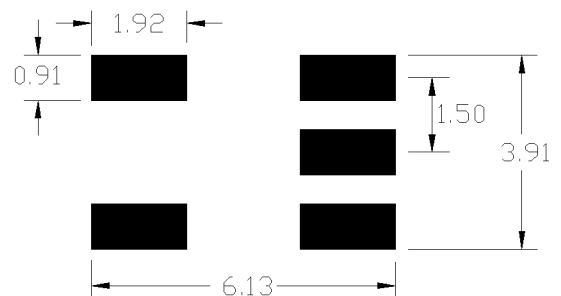


Typical Performance Curves


Insertion Loss

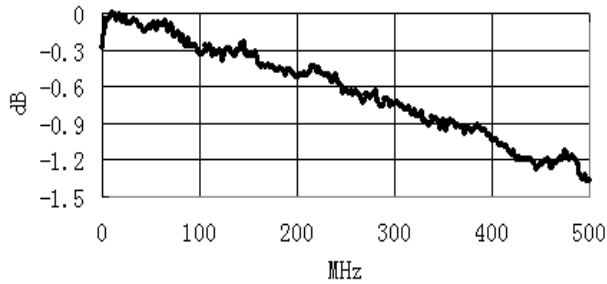


Input Return Loss

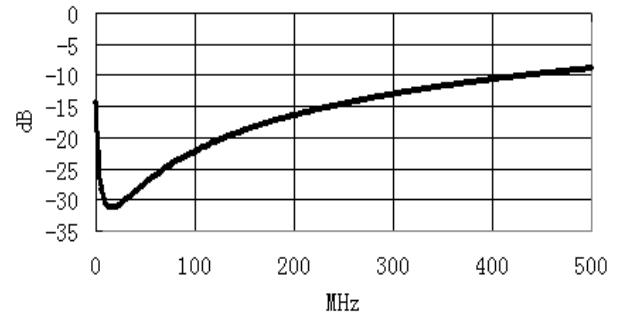

Amplitude Unbalance

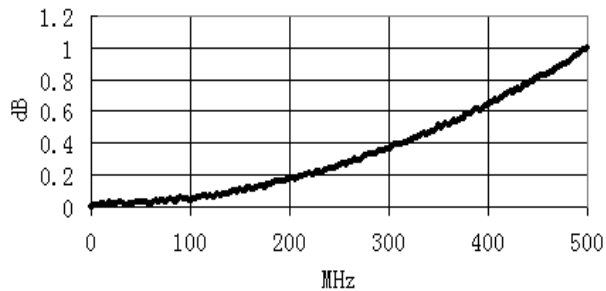

Phase Unbalance

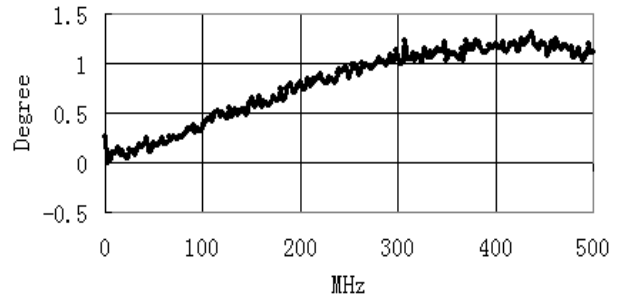

Electrical Specifications: $Z_0 = 50\Omega$, $T_A = 25^\circ\text{C}$, $P_{in} = 0\text{dBm}$